


STEIN-Diaphragm-wall-grab SK 80



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 800/1000/1200/1500 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.



MFS Maschinenfabrik GmbH & Co KG

Production

Phone + 49 (0) 4421 1434 0
Fax + 49 (0) 4421 3034 81
E-mail info@mfs-mafa.de
Address Langeoogstr. 13
 26384 Wilhelmshaven | Germany


Sale

Phone + 49 (0) 2323 9266 0
Fax + 49 (0) 2323 9266 25
E-mail kendlik@stein-ht.de
Address Schnittstr. 6
 44653 Herne | Germany

for the wall thickness 800 / 1000 / 1200 / 1500 mm

with wire-rope-pulleys \varnothing 500 mm for wire-rope \varnothing 24 - 28 mm
 two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.

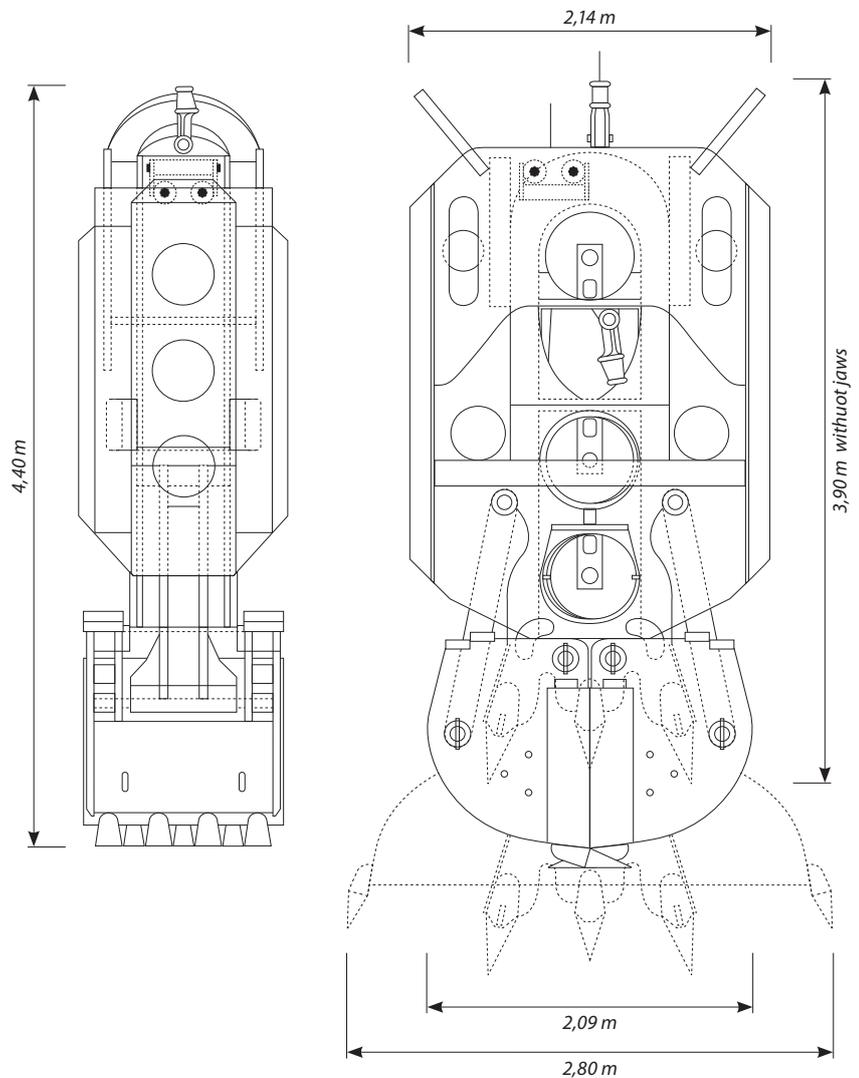

Grab - body [kg]	9.600			
Light extension 800 - 1000 mm [kg]	400			
Light extension 800 - 1200 mm [kg]	800			
Light extension 800 - 1500 mm [kg]	750			
Jaws opening [mm]	2800			
Jaws width [mm]	800	1000	1200	1500
Jaws weight [kg]	1.950	2.650	3.200	4.100
Overall weights minimal [kg]	11.550	12.650	13.600	14.450
Overall weights maximal [kg]

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.