

# STEIN-Diaphragm-wall-grab K 1010 HD





for the wall thickness 1000 / 1200 / 1500 mm

with wire-rope-pulleys  $\varnothing$  800 mm for wire-rope  $\varnothing$  34 - 36 mm  
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.

The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 1000/1200/1500mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

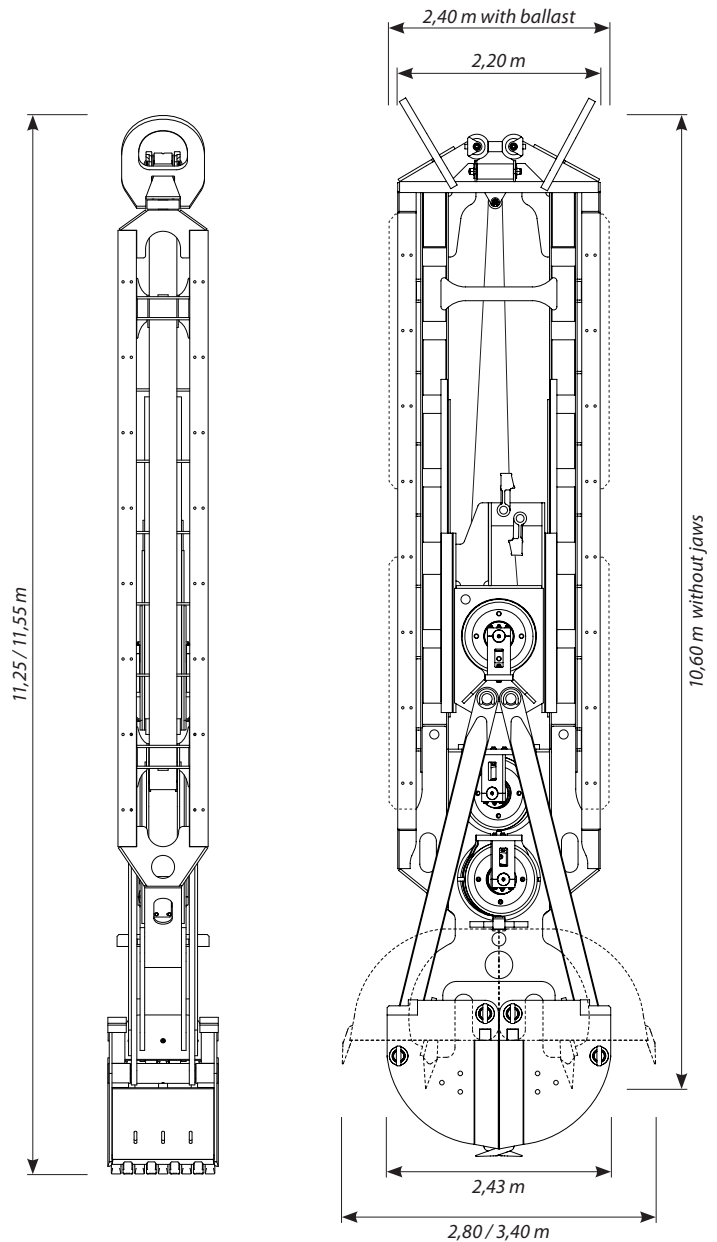

## MFS Maschinenfabrik GmbH & Co KG

### Production

Phone + 49 (0) 4421 1434 0  
 Fax + 49 (0) 4421 3034 81  
 E-mail info@mfs-mafa.de  
 Address Langeoogstr. 13  
 26384 Wilhelmshaven | Germany

### Sale

Phone + 49 (0) 2323 9266 0  
 Fax + 49 (0) 2323 9266 25  
 E-mail kendlik@stein-ht.de  
 Address Schnittstr. 6  
 44653 Herne | Germany

Grab - body [kg]	19.800					
Ballast weight [kg]	3.800					
Extension 1000 - 1200 mm [kg]	1.050					
Light extension 1000 - 1500 mm [kg]	2.000					
Jaws opening [mm]	2800			3400 (rectangular)		
Jaws width [mm]	1000	1200	1500	1000	1200	1500
Jaws weight [kg]	2.900	3.600	4.900	3.400	4.000	5.100
Overall weights minimal [kg]	22.700	24.450	26.700	24.250	24.850	27.100
Overall weights maximal [kg]	26.500	28.250	29.550	27.000	28.650	30.900

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.