

# STEIN-Diaphragm-wall-grab K 1210 HD





for the wall thickness 1200 / 1300 / 1500 mm

with wire-rope-pulleys  $\varnothing$  800 mm for wire-rope  $\varnothing$  34 - 36 mm  
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.

The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 1200/1300/1500 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

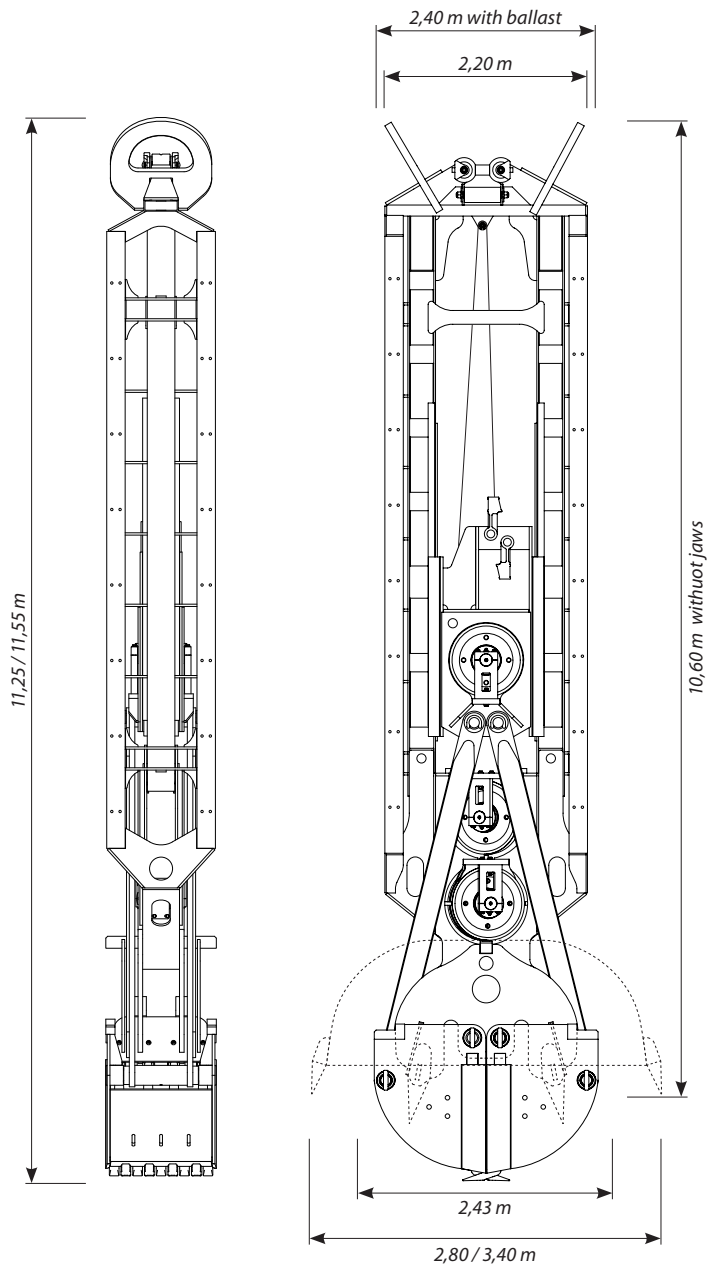

## MFS Maschinenfabrik GmbH & Co KG

### Production

Phone + 49 (0) 4421 1434 0  
Fax + 49 (0) 4421 3034 81  
E-mail info@mfs-mafa.de  
Address Langeoogstr. 13  
26384 Wilhelmshaven | Germany

### Sale

Phone + 49 (0) 2323 9266 0  
Fax + 49 (0) 2323 9266 25  
E-mail kendlik@stein-ht.de  
Address Schnittstr. 6  
44653 Herne | Germany

Grab - body [kg]	20.800					
Ballast [kg]	3.800					
Light extension 1200 - 1300 mm [kg]	1.040					
Light extension 1200 - 1500 mm [kg]	1.120					
Jaws opening [mm]	2800			3400		
Jaws width [mm]	1200	1300	1500	1200	1300	1500
Jaws weight [kg]	3.400	3.900	4.400	3.700	4.300	4.900
Overall weights minimal [kg]	24.200	25.040	25.720	23.800	25.440	26.120
Overall weights maximal [kg]	28.000	28.840	29.520	27.600	29.240	29.920

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.