

STEIN-Diaphragm-wall-grab K 160

for the wall thickness 600 / 800 mm



with wire-rope-pulleys \varnothing 600 mm for wire-rope \varnothing 28 - 32 mm
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 600 / 800 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

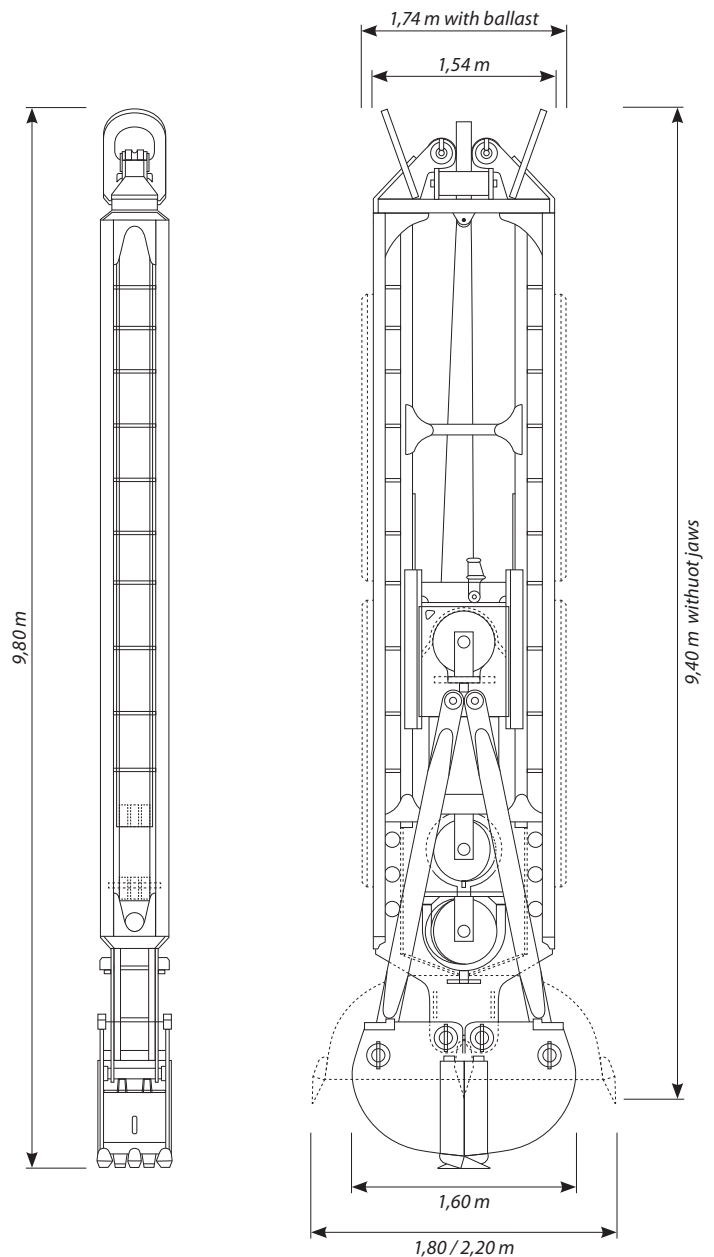

MFS Maschinenfabrik GmbH & Co KG

Production

Phone + 49 (0) 4421 1434 0
 Fax + 49 (0) 4421 3034 81
 E-mail info@mfs-mafa.de
 Address Langeoogstr. 13
 26384 Wilhelmshaven | Germany

Sale

Phoen + 49 (0) 2323 9266 0
 Fax + 49 (0) 2323 9266 25
 E-mail kendlik@stein-ht.de
 Address Schnittstr. 6
 44653 Herne | Germany

Grab - body [kg]	7.630			
Extension 600 - 800 mm [kg]	2.100 (16 pcs.)			
Jaws opening [mm]	1800		2200	
Jaws width [mm]	600	800	600	800
Jaws weight [kg]	1.020	-	1.220	-
Overall weights minimal [kg]	8.650		8.850	
Overall weights maximal [kg]	10.750		10.950	

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.