

STEIN-Diaphragm-wall-grab K 410

for the wall thickness 400 / 450 / 500 / 600 mm



with wire-rope-pulleys \varnothing 600 mm for wire-rope \varnothing 26 - 28 mm
one dopple and two single pulleys

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 400/450/500/600 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

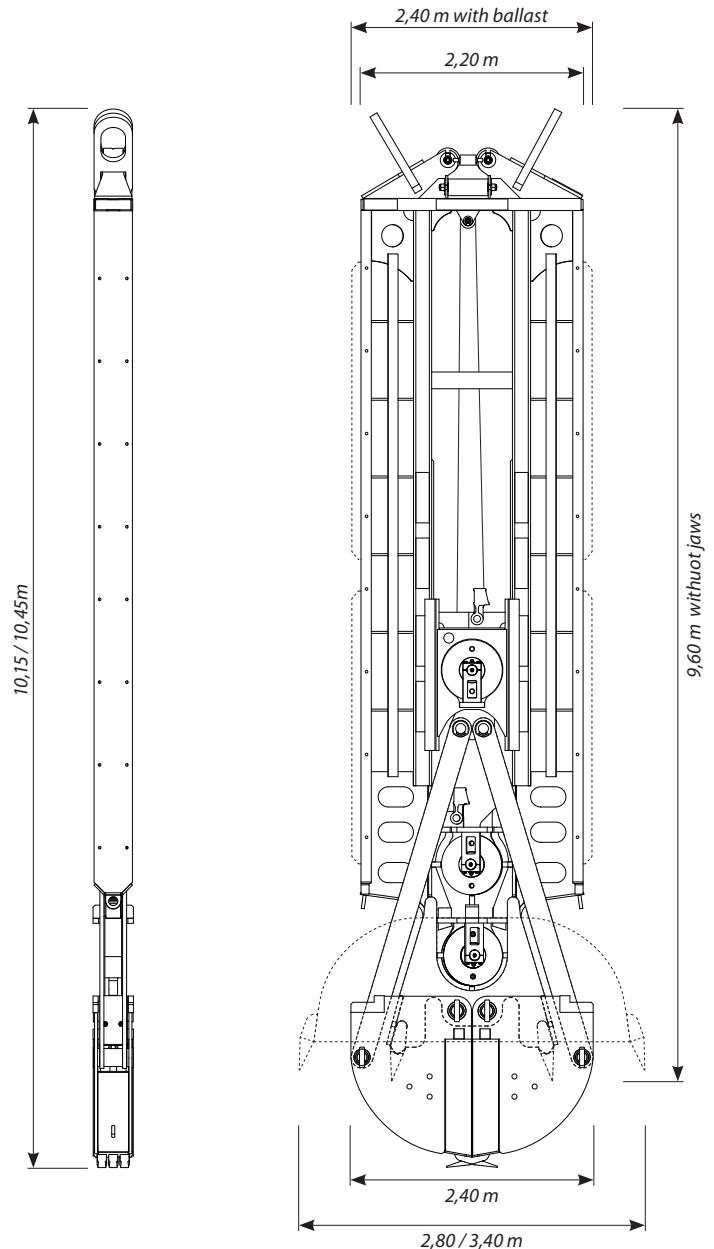

MFS Maschinenfabrik GmbH & Co KG

Production

Phone + 49 (0) 4421 1434 0
 Fax + 49 (0) 4421 3034 81
 E-mail info@mfs-mafa.de
 Address Langeoogstr. 13
 26384 Wilhelmshaven | Germany

Sale

Phone + 49 (0) 2323 9266 0
 Fax + 49 (0) 2323 9266 25
 E-mail kendlik@stein-ht.de
 Address Schnittstr. 6
 44653 Herne | Germany

| | | | | | | | | |
|-----------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Grab - body [kg] | 8.550 | | | | | | | |
| Extension 400 - 450 mm [kg] | 520 | | | | | | | |
| Extension 400 - 500 mm [kg] | 1.050 | | | | | | | |
| Extension 400 - 600 mm [kg] | 2.100 | | | | | | | |
| Light extension 400 - 600 mm [kg] | 1.060 | | | | | | | |
| Jaws opening [mm] | 2800 | | | | 3400 | | | |
| Jaws width [mm] | 400 | 450 | 500 | 600 | 400 | 450 | 500 | 600 |
| Jaws weight [kg] | 1.700 | 1.800 | 2.050 | 2.500 | 2.200 | 2.200 | 2.300 | 2.600 |
| Overall weights minimal [kg] | 10.250 | 10.870 | 11.650 | 12.110 | 10.550 | 11.270 | 11.900 | 12.210 |
| Overall weights maximal [kg] | 12.350 | 12.970 | 12.700 | 14.210 | 12.650 | 13.370 | 12.950 | 14.310 |

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.