

# STEIN-Diaphragm-wall-grab K 510 HD





for the wall thickness 500 / 600 / 800 mm

with wire-rope-pulleys  $\varnothing$  600 mm for wire-rope  $\varnothing$  28 - 32 mm  
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.

The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 500/600/800mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

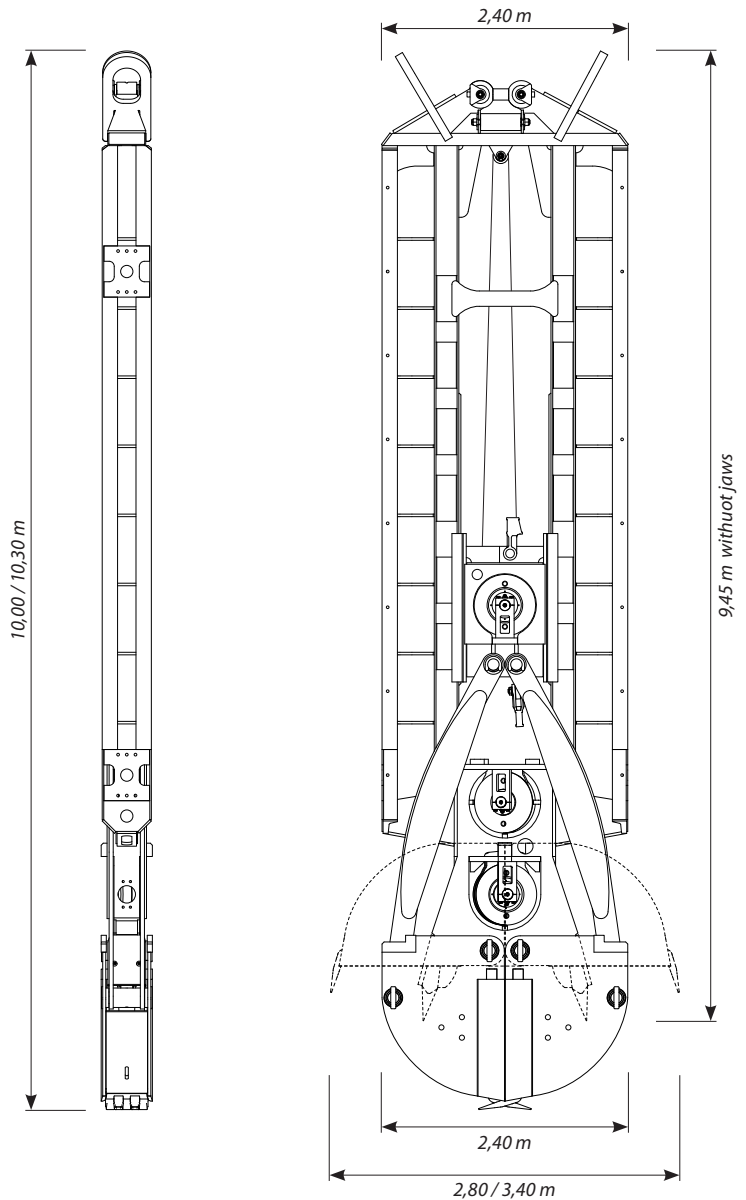

## MFS Maschinenfabrik GmbH & Co KG

### Production

Phone + 49 (0) 4421 1434 0  
 Fax + 49 (0) 4421 3034 81  
 E-mail info@mfs-mafa.de  
 Address Langeoogstr. 13  
 26384 Wilhelmshaven | Germany

### Sale

Phone + 49 (0) 2323 9266 0  
 Fax + 49 (0) 2323 9266 25  
 E-vail kendlik@stein-ht.de  
 Address Schnittstr. 6  
 44653 Herne | Germany

Grab - body [kg]	9.900					
Extension 500 - 600 mm [kg]	1.050					
Light extension 500 - 800 mm [kg]	930					
Jaws opening [mm]	2800			3400		
Jaws width [mm]	500	600	800	500	600	800
Jaws weight [kg]	2.200	2.400	2.700	-	2.620	-
Overall weights minimal [kg]	12.100	13.350	13.530		13.570	
Overall weights maximal [kg]	...	...	...		...	

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.