

STEIN-Diaphragm-wall-grab K 60 II

length 10,00 m

for the wall thickness 600 / 800 mm


with wire-rope-pulleys \varnothing 500 mm for wire-rope \varnothing 24 - 28 mm
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 600 / 800 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.




MFS Maschinenfabrik GmbH & Co KG

Production

Phone + 49 (0) 4421 1434 0
 Fax + 49 (0) 4421 3034 81
 E-mail info@mfs-mafa.de
 Address Langeoogstr. 13
 26384 Wilhelmshaven | Germany

Sale

Phone + 49 (0) 2323 9266 0
 Fax + 49 (0) 2323 9266 25
 E-mail kendlik@stein-ht.de
 Address Schnittstr. 6
 44653 Herne | Germany

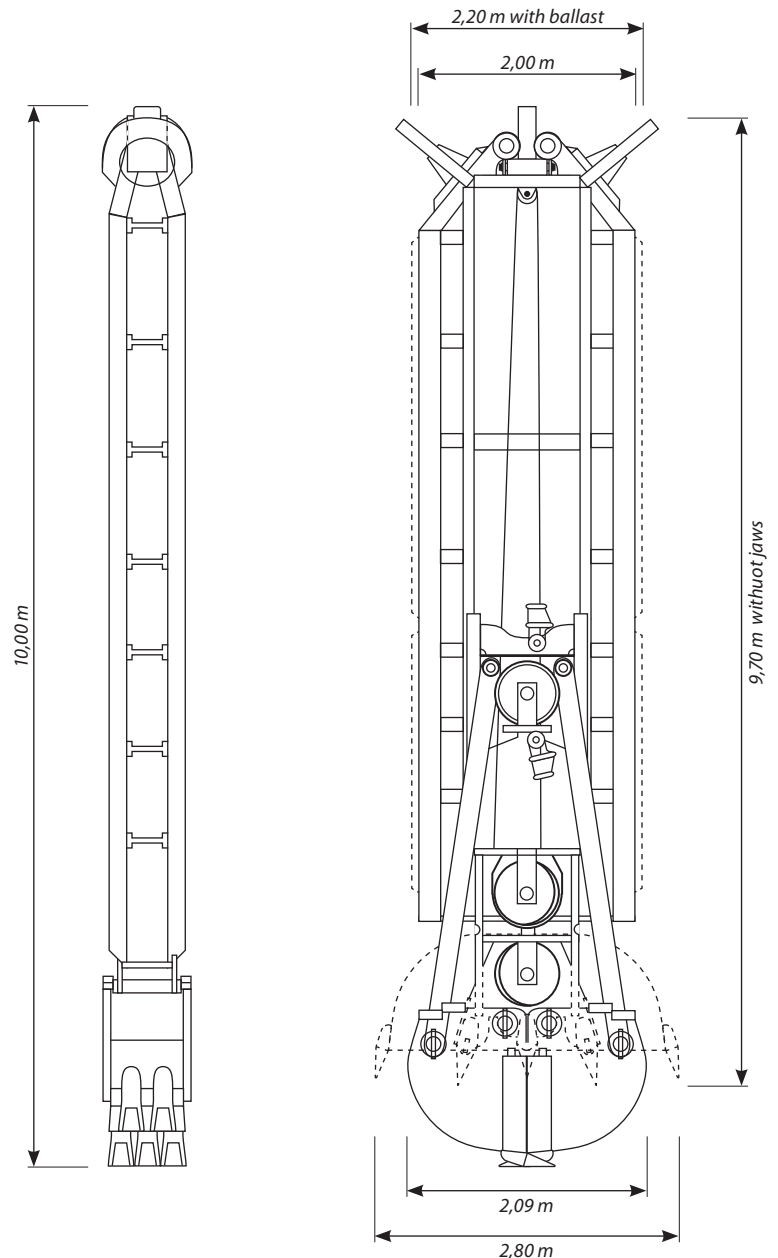

grab - body [kg]	8.000	
extension 600 - 800 mm [kg]	3.800	
light extension 600 - 800 mm [kg]	1.050	
jaws opening [mm]	2800	
jaws width [mm]	600	800
jaws weight [kg]	1.650	2.250
overall weights minimal [kg]	9.650	11.300
overall weights maximal [kg]	13.450	15.100

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.