

# STEIN-Diaphragm-wall-grab K 60 II



length 6,60 m



for the wall thickness 600 / 800 mm

with wire-rope-pulleys  $\varnothing$  500 mm for wire-rope  $\varnothing$  24 - 28 mm  
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.

The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 600 / 800 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

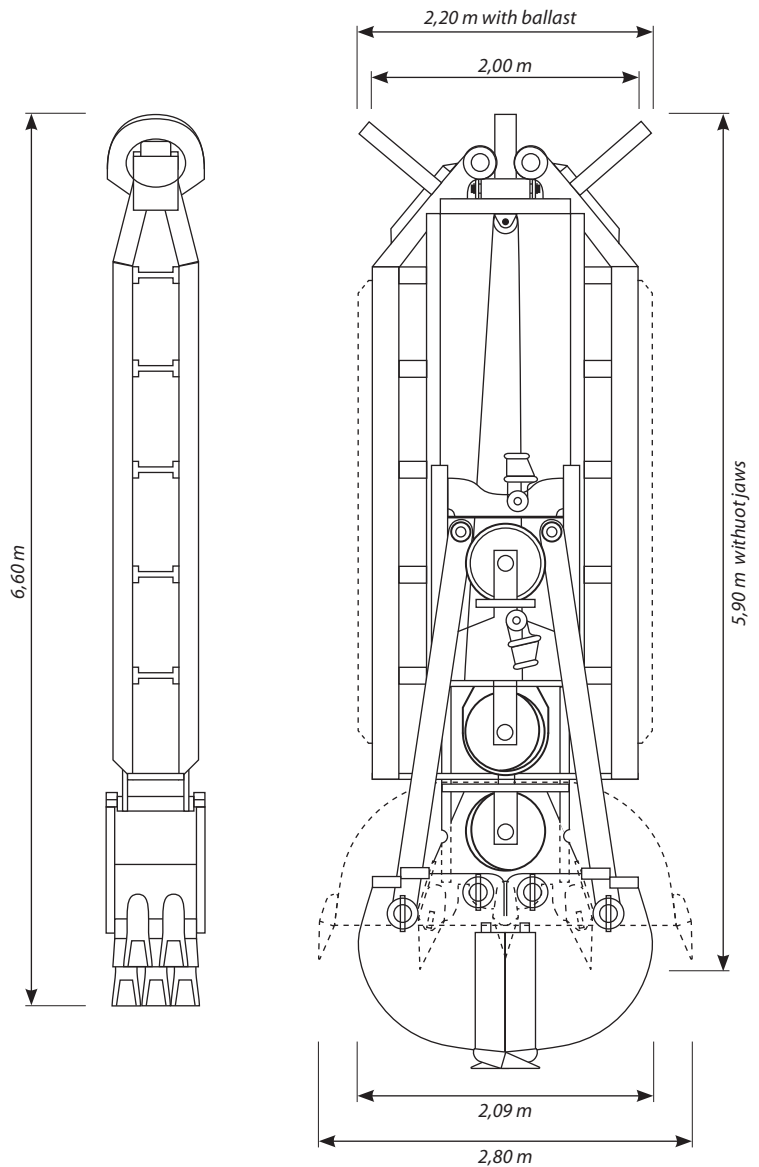

## MFS Maschinenfabrik GmbH & Co KG

### Production

Phone + 49 (0) 4421 1434 0  
 Fax + 49 (0) 4421 3034 81  
 E-mail info@mfs-mafa.de  
 Address Langeoogstr. 13  
 26384 Wilhelmshaven | Germany

### Sale

Phone + 49 (0) 2323 9266 0  
 Fax + 49 (0) 2323 9266 25  
 E-mail kendlik@stein-ht.de  
 Address Schnittstr. 6  
 44653 Herne | Germany

grab - body [kg]	6.500	
extension 600 - 800 mm [kg]	1.900	
light extension 600 - 800 mm [kg]	520	
jaws opening [mm]	2800	
jaws width [mm]	600	800
jaws weight [kg]	1.650	2.250
overall weights minimal [kg]	8.150	9.270
overall weights maximal [kg]	10.050	11.170

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.