

STEIN-Diaphragm-wall-grab K 610 HD

for the wall thickness 600 / 800 / 1000 mm



with wire-rope-pulleys \varnothing 600 mm for wire-rope \varnothing 28 - 32 mm
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 600/800/1000 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

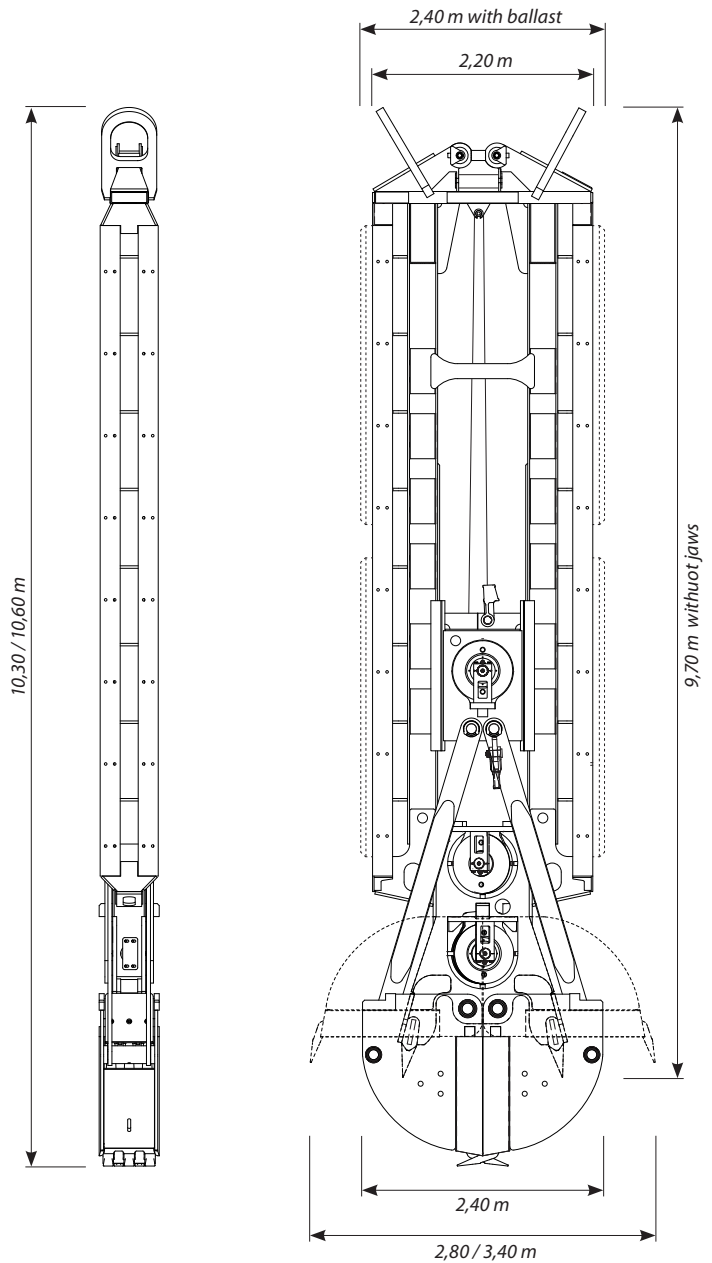

MFS Maschinenfabrik GmbH & Co KG

Production

Phone + 49 (0) 4421 1434 0
 Fax + 49 (0) 4421 3034 81
 E-mail info@mfs-mafa.de
 Address Langeoogstr. 13
 26384 Wilhelmshaven | Germany

Sale

Phone + 49 (0) 2323 9266 0
 Fax + 49 (0) 2323 9266 25
 E-mail kendlik@stein-ht.de
 Address Schnittstr. 6
 44653 Herne | Germany

From construction year 2009

Grab - body [kg]	11.700					
Extension 600 - 800 mm [kg]	3.800					
Light extension 600 - 800 mm [kg]	1.050					
Light extension 600 - 1000 mm [kg]	2.000					
Jaws opening [mm]	2800			3400		
Jaws width [mm]	600	800	1000	600	800	1000
Jaws weight [kg]	2.200	2.700	3.500	2.300	3.100	3.600
Overall weights minimal [kg]	13.900	15.450	17.200	14.000	15.850	17.300
Overall weights maximal [kg]	17.700	19.250	21.000	17.800	19.650	21.100

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.